

INSTALLATION INSTRUCTIONS

TOP MOUNT STAINLESS STEEL SINKS

MODELS#

S710
S710-O
S711
S711-O
S712
S712-O





READ ALL INSTRUCTIONS BEFORE UNPACKING THE PRODUCT



INSTRUCTIONS THAT, IF IGNORED, COULD RESULT IN DEATH OR SERIOUS INJURY CAUSED BY INCORRECT HANDLING OR INSTALLATION OF THE PRODUCT. THESE INSTRUCTIONS MUST BE OBSERVED FOR SAFE INSTALLATION.

ATTENTION!



2 PEOPLE ARE REQUIRED TO LIFT AND DURING ENTIRE INSTALLATION OF THIS PRODUCT



INSTALLATION OF THIS PRODUCT BY AN INEXPERIENCED INSTALLER MAY RESULT IN PERSONAL INJURY OR DEATH!



We reserves the right to change, update, modify, alter, redesign this manual/product or its policies without prior notice! It is your responsibility to visit the website to download or contact customer service for the most updated version of the installation instructions.

We shall not be liable for any injuries or property damages in connection with this product during installation or use of this product!

- Limited warranty is void on any commercial installation.
- We are not responsible for local code compliance for this product.
- Building and plumbing codes may vary from state-to-state in accordance to your location.
- We are not responsible for providing any compliance certifications.
- We are not responsible to provide any type of certifications for this product.
- Under no circumstances we shall not be liable for any and all incidental damages sustained in connection with this product Neither manufacture, nor distributor, nor retailer is responsible for water damage or flood caused due to use of this product.
- Under no circumstances We shall not be liable for any and all fees, cost of installation/re-installation/removal, subsequent damage or transportation in case of the product defect.

TOP MOUNT STAINLESS STEEL SINK



TOOLS REQUIRED FOR INSTALLATION




Wrench




Phillips
Screwdriver




Flathead
Screwdriver



Silicone




Level




Tape Measure




Jigsaw



Drill



Pencil / Marker



Hacksaw



Safety Glass



INSTALLATION TIPS

- For optimum installation results homeowner, cabinet maker, countertop and sink installers should all be involved in the planning and installation process.
- The manufacturer suggests this sink be installed by a locally licensed professional and recommends using the actual sink to determine the final cabinet and counter top dimensions.
- Prior to installation be sure to inspect sink for damage.
The manufacturer is not responsible for damage caused during installation or by improper installation.
- Be sure to use proper tools and always wear personal protective equipment for your safety.

Caution: Metal edges may be sharp, handle with care.

top mount sinks are sinks that are attached from above the countertop. These instructions are for installing top mount stainless steel sinks in a solid surface countertop only. The manufacturer recommends that dropin sinks installed by a professional installer for best results. Please carefully read complete instruction before beginning installation.


1

Preparing the countertop

Place the template (B) on the countertop.

Ensure the template is centered on the counter so that it is parallel to the counter edge and that the installation hole will not interfere with the structure of the cabinet.

Tape the template (B) to the countertop to keep it in place and trace the cutout line on the template (B) with a pencil.

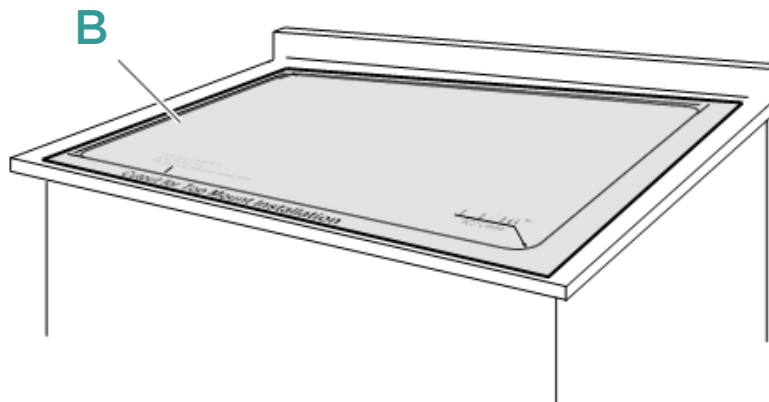




2

Cutting the installation hole

Drill a pilot hole and cut the countertop opening.


Use the appropriate cutting tool for the surface you are cutting and cut along the inside of the template line.

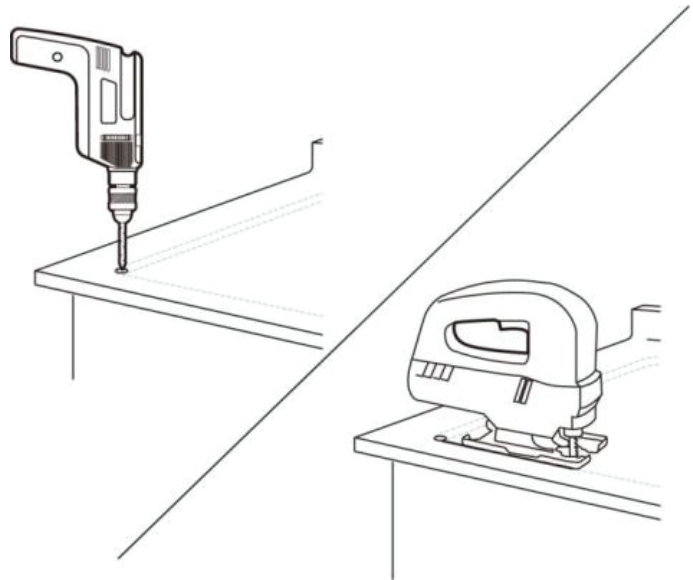

3

Attaching the mounting clips


Attach the top mount clips (AA) at the corners of the sink (A) and space the rest evenly around the of the sink(A)

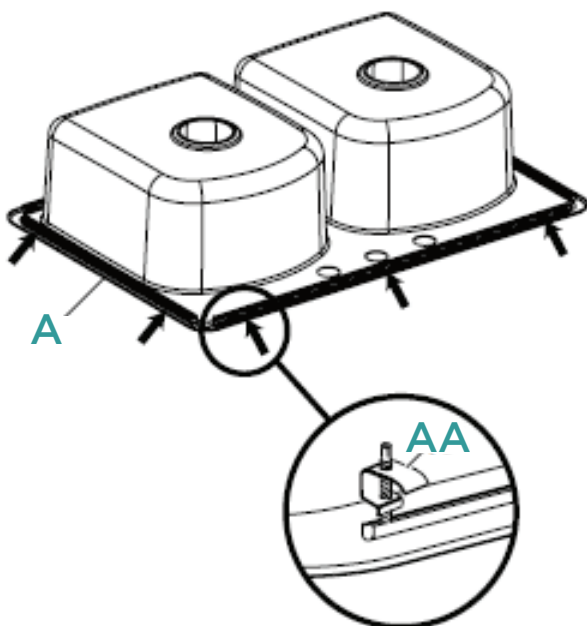


4

Installing the sink

Apply the silicon sealant (not included) around the underside and lip of the sink (A). Carefully put the sink (A) into the counter. Tighten the screws on the installation clips (AA) evenly until the sink is flush with the counter. Do not over-tighten. Wipe excess sealant with a rag.

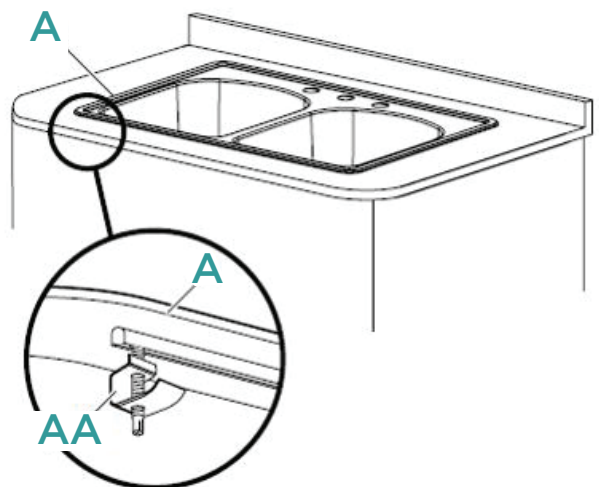


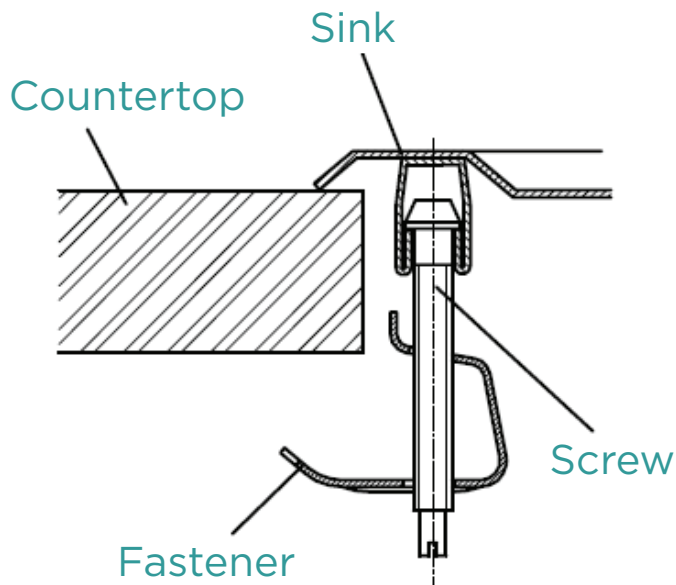


AFTER
INSTALLATION




WAIT 8 HRS
BEFORE USE



Insert
the sink



Rotate
the clip

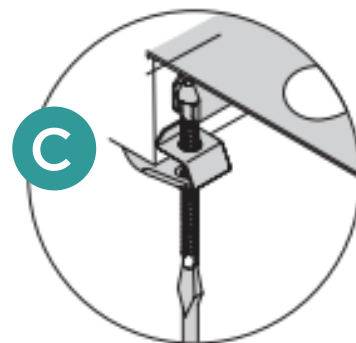

Tighten to
secure sink



CARE AND CLEANING GUIDELINES

Cleaning

- Daily, regular cleaning to remove dirt and prevent staining is recommended. Use liquid dish detergent, water and a soft household sponge.
- Mild, non-abrasive cleaners can be used with a nylon scrub pad. To ensure a uniform appearance in a stainless steel sink surface, rinse with water and wipe down the sink with a soft, dry cloth. Drying the sink will prevent water spots caused by time in the water.
- Remove stubborn stains from lime or calcium deposits by pouring a little warm vinegar or vinegar-based cleaner into the sink and allow it to sit for a few minutes. Rinse with clean water and dry.

Please note chlorides are found in most all soap, detergents, bleaches and cleansers. Chlorides can be harsh on stainless steel. Rinse your sink thoroughly after each use to remove any chloride residue.

Scratches

Scratches are inevitable during your usage over time. To treat, use a nylon pad with an iron free abrasive polishing compound. Follow the original polish lines to blend out the scratch in a small area. Be cautious not to overdo the process, as cleaning too aggressively could result in a bright spot.

Rust Spots

Stainless steel does not rust. Rust stains are the result of iron particles introduced by water, cookware, and steel wool pads that react with water to create rust. Metal cleaners will remove rust spots.

Food Stains

Depending on the severity of the stain, use a bleach and water solution or pour the bleach onto a cloth and cover the stain. Allow the bleach to sit for at least 1/2 hour and then clean with dish detergent and water.

Some Don'ts

- ✗ DO NOT use strong abrasive cleaners, metal scrub pads, or steel wool. These will scratch the surface.
- ✗ DO NOT leave rubber mats or sponges inside the sink. Water trapped below could lead to stains.
- ✗ DO NOT let food with a high salt content sit inside the sink for prolonged periods of time.
- ✗ DO NOT allow chlorine bleach to sit inside a stainless steel sink for more than 1 hour.
- ✗ DO NOT allow drain cleaners to come into contact with the sink surface.
- ✗ DO NOT pour paint in your sink. The chemicals in acrylic paint will react with sinks if allowed to sit over 24 hours and will produce permanent marks. For latex based paints, remove any residue immediately using a paint remover manufactured by the same brand. Consult the paint remover recommendations before using on the sink. For all sinks, we also recommend nail polish remover, rubbing alcohol or an acetone based paint remover to eliminate paint residue.



206 WEMBLY ROAD - NEW WINDSOR, NY 12553
P: 718.602.6060 F: 718.963.2082 - E: INFO@FINEFIXTURES.COM
TOLL FREE: 1.877.8FIXTURES
FINEFIXTURES.COM

